


Underfloor Heating System TE-20 Therm GF

Product data sheet

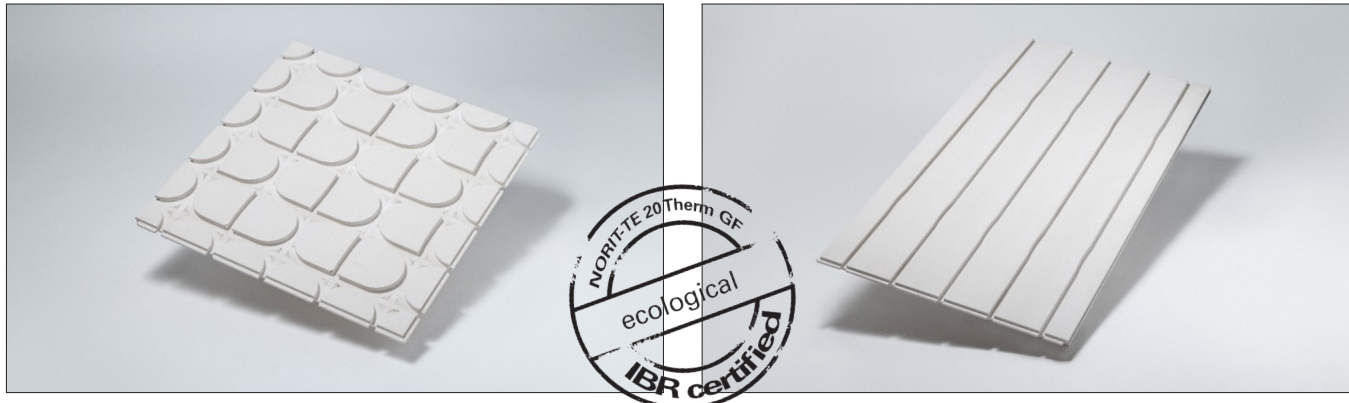

Description

The gypsum fibre based NORIT-TE 20 Therm GF dry screed element is an integral part of the NORIT-Underfloor Heating System.

It acts as a load-distributing layer and enables the NORIT-Heating Tube to be installed different layouts.

Dimensions

NORIT-TE 20 Therm GF-U: 600 x 600 mm
(Universal element with innovatively milled layout)

NORIT-TE 20 Therm GF-E: 1,200 x 600 mm
(Complementary element with simply milled layout)

Advantages

tongue and groove connection without screwing

acts as a load-distributing layer in combination with NORIT-Filler Universal

Fix-piping for a safe and quick installation of the NORIT-Heating Tube

Suitable for damp locations

Ecologically tested and recommended panel material

Extremely high accuracy of fit

Processing

We recommend a hand-held circular saw with guide rails for straight cuts or a jigsaw for roundings and smaller cutouts. Please visit our website for a more detailed installation guide.

Technical specifications

Panel thickness	20 mm
Board density	approx. 1,250 kg/m ³
Weight	approx. 7.9 kg/element (NORIT-TE 20 Therm GF-U) approx. 18.9 kg/element (NORIT-TE 20 Therm GF-E)
Building material class	A1 (DIN EN 13501-1)
Product classification	DIN14190
Standard grid spacing	120 mm

Delivery/Storage

NORIT-TE 20 Therm GF-U, 60 elements/pallet
(approx. 485 kg/pallet)

NORIT-TE 20 Therm GF-E, 60 elements/pallet
(approx. 1,150 kg/pallet)

Storage in a dry environment

Store at the installation site for two days for acclimatization

Certificates

